


NetPoint NP6-DP-3FT (NP6)





Parabolic Antenna High Performance

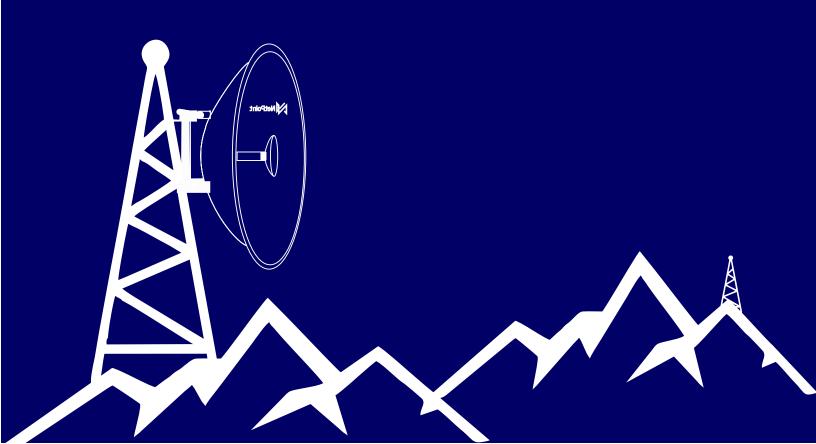

NetPoint's NP6-DP3FT super high performance dish antenna is designed to work with very high performance in both licensed and unlicensed bands with excellent gain. The NP6-DP-3FT model has dual polarization and an N-female connector, as well as exceptional VSRW performance in the 5.9 to 7.2 GHz operating band. The antenna comes pre-assembled and ready to install, as well as an integrated radome for high performance and reliable operation in the most demanding conditions. This 3-foot parabolic antenna can be used for PTP backhaul, CPE and public safety applications.

NP6-DP-3FT (NP6)



FEATURES AND BENEFITS

- Gain of up to 32 dBi with low VSWR and high port isolation across the entire 5.9 -7.2 GHz band
- One antenna that covers 6 and 7 Ghz
- Reduced interference with >35 dB minimum front to back
- · Simplifies installation on site and guarantees "factory-tested" quality
- Connector type N Female
- Pigtails of N to RPSMA included in the box for free!!!

ELECTRIC SPECIFICATIONS

Antenna type Directional parabolic reflector

Frecuency 5.9 - 7.2 Ghz Connector type Female N

Gain (dBi) 30, 31, 32

5.9GHz, 6.8GHz and 7.2GHz

VSWR HPOL <2.0 Beamwidth VPOL 3.0° Beamwidth HPOL 3.2° Impedance (Ohms) 50 Radius F/B (dB) >25

Polarization Dual slant 45° or 90°

MECHANICAL SPECIFICATIONS

Wind max survival speed (MPH) 124.2 miles with Radome

Azimuth adjustment +/- 60 degrees
Elevation adjustment (°) +/- 15 degrees
Mounting Pipe Diameter, Min 1 inch - 25.4mm
Mounting Pipe Diameter, Max 2.95 inch 75.00mm

Operating temperature (C°) -49 to +140 F° | -45 to +60 C° Connector type Dual N-Female with pigtails for

RP-SMA

Lenght of Pig tail 2ft - 600 mm


SHIPPING INFORMATION

Package type Cardboard Gross weigh (Kg) 39.68lb - 18kg




RADIATION PATTERN

Vertical



Horizontal



TECHNICAL DRAWING

