

IURON


FIBER OPTIC SPLICE CLOSURE

IU-ODN-FOSC-H-096

Iuron FOSC/Distribution Box Hybrid
Enclosure Empty 96 Core Horizontal

APPLICATION

- ✔ Telecommunication subscriber loop
- ✔ Fiber to the home (FTTH)
- ✔ LAN/WAN

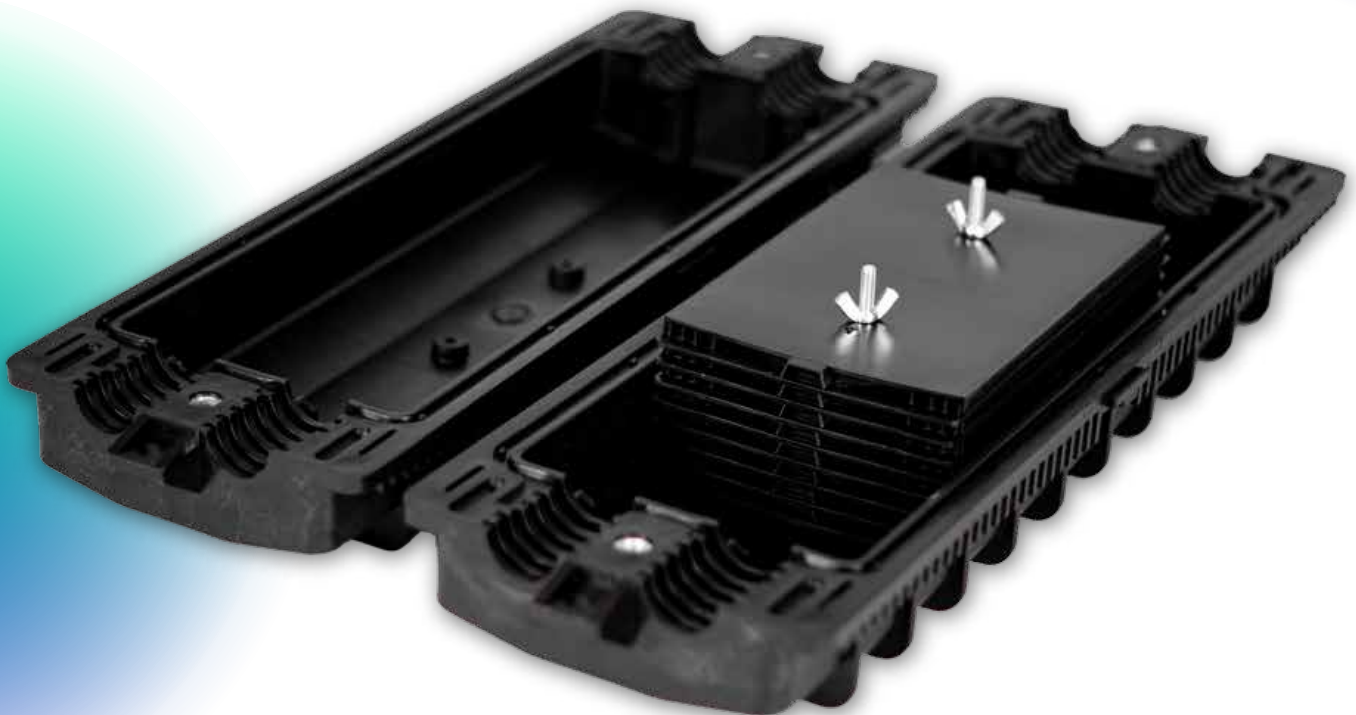

TECHNICAL DATA

FIBER OPTIC SPLICE CLOSURE

Work Temperature	-40 °C ~+75 °C
Relative Humidity	≤ 85%
Atmospheric Pressure	70Kpa~106Kpa
Standard	YD/T814.1-2004
Tension	800N/1min
Impact	1m/1kg SteelBall/threetimes
Bending	150N/±45°/10cycles
Torsion	50N.m/+90°/10 cycles
Insulation Resistance	2x10 ⁴ MQ/500V
Compression Strength	15kv/1min/10mA
Dimensions	470x155x105mm

IURON



info@iuron.com



www.iuron.com