



TP-SCPOE-2448-HP

DATA SHEET

PoE /Solar Charge Controller

Features

- Dual Input - Charges 24V Batteries from Solar Panel and / or Passive PoE
- Supports up to 60W Total Device Load
- Regulated 48VDC 30W Passive PoE output
- Regulated 24VDC Secondary Output Voltage
- Compact and high temperature operation
- Low self consumption < 0.5W



TP-SCPOE-2448-HP Charge Controller

Applications

- Remote Power Systems; Surveillance, Sensors
- Wireless Stations ; AP / Client / Repeaters
- UPS Systems ; Lighting, Fences, Gates

Description

Tycon Solar® unique PoE/Solar charge controllers have dual inputs to charge batteries from a PoE source and also a secondary source like solar panels in order to provide redundancy and insure 100% uptime for critical applications. The solar panel input takes priority so that when the sun is shining the grid power usage is minimized. They have a built in PoE inserter regulated voltage output. They have full electronic protections for short circuit, reverse current, overvoltage, overcharge and over discharge.

They have five LED indicators to give a quick visual status if current is being supplied by a PoE source or solar panel, if battery is charging, if load output is turned on, and a warning if battery is connected with reverse polarity.

Solar and Battery Connections are via 5 screw terminals for wire size up to 10AWG. PoE Input and Output is via 2 RJ45 shielded connectors. There is a secondary output connector on the back with 5 screw terminals for connecting other electronics to the controller using up to 10AWG wire. The 48VDC passive POE output and 24VDC secondary output are regulated to prevent damage to devices due to overvoltage. The controllers are externally fused with a standard replaceable fuse.

The TP-SCPOE-2448-HP can provide up to 60W total power for powering various equipment.

PoE Pinout

RJ-45 Input (Data & Power)			RJ-45 Output (Data & Power)	
Pin	Symbol	Description	Symbol	Description
1	RX+	Data Receive(+)	RX+	Data Receive(+)
2	RX-	Data Receive(-)	RX-	Data Receive(-)
3	TX+	Data Transmit(+)	TX+	Data Transmit(+)
4	+Vdc in	DC Power to battery charge circuit	+Vdc out	DC power(+) to device
5	+Vdc in	DC Power to battery charge circuit	+Vdc out	DC power(+) to device
6	TX-	Data Transmit(-)	TX-	Data Transmit(-)
7	-Vdc in	DC Power to battery charge circuit	-Vdc out	DC power(-) to device
8	-Vdc in	DC Power to battery charge circuit	-Vdc out	DC power(-) to device

Specifications

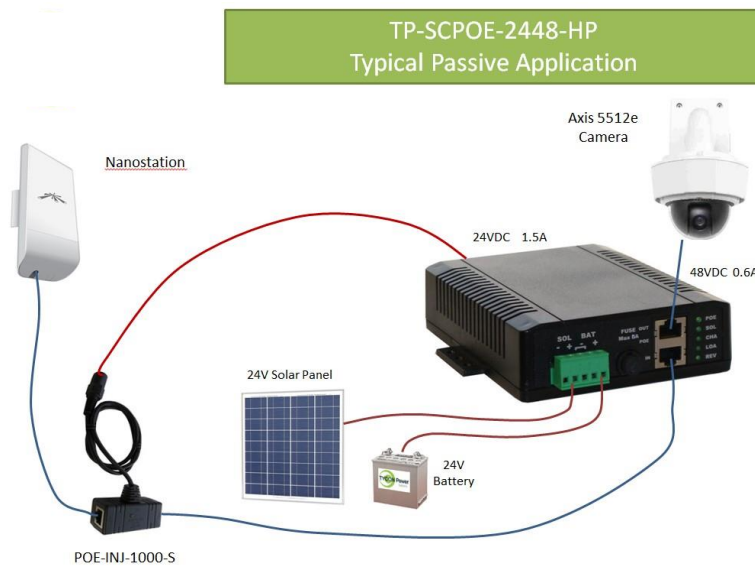
	TP-SCPOE-2448-HP
Solar Input Voltage	24V - 36Vmax @ 8A max
POE Input Voltage	36V - 57V max @ 2.6A max
Battery Voltage	24V
POE Output	48V @ 0.625A
Secondary Output	20V to 25V @ 1.5A max
Maintenance Voltage	27.3 +/- 0.5V
Overcharge Protection	28.6 +/- 0.3V
Over Discharge Voltage	Load Output Off: 20.0 +/-0.3V Load Output On: 24.3 +/-0.3V
Load-On Self Consumption	< 0.5W
Load-Off Consumption	1.7mA Typ 0.02W
Max Wire Size	10 AWG
Operating Temp	-30°C to 60°C (-22°F to 140°F)
Dimensions	159 x 118 x 40mm (6.3 x 4.6 x 1.6")
Weight	312 g (11 oz)

Notes:

- All shipments F.O.B. Bluffdale, UT 84065
- TP-SCPOE Charge Controllers carry a 3 year warranty



Back panel view

**System Ordering:**

TP-SCPOE-2448-HP
battery systems

24V in; 48VDC PoE, 24VDC Secondary out ; PoE/Solar Charge Controller for 24V

For further information contact:

Tyconsystems.com

