VERKADA

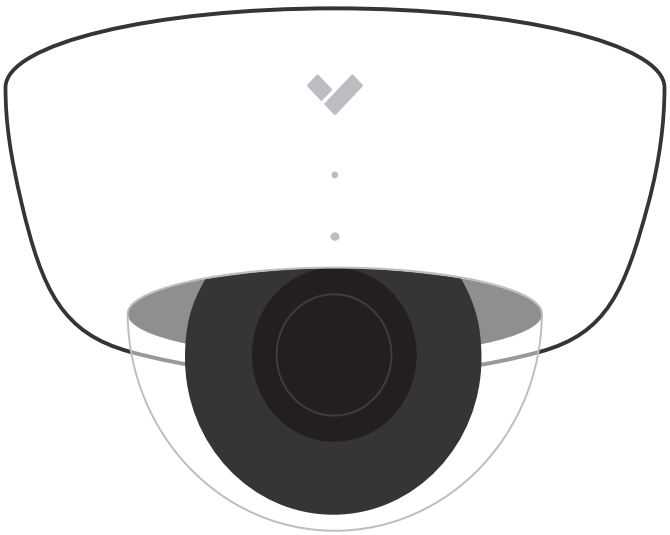

D30 Indoor Camera

1/2.8″ Progressive CMOS Sensor • Built-in IR Illuminators • P-iris Lens

Image Sensor	1/2.8″ Progressive CMOS
Maximum Resolution	2048x1536 (3MP)
Lens Type	Varifocal
Focus	Autofocus
Focal Length	f = 3 ~ 9 mm
Aperture	F1.2 ~ F2.3
Auto-iris	P-iris
Field of View	41° ~ 86° Horizontal 31° ~ 64° Vertical 51° ~ 113° Diagonal
Shutter Time	1/5 sec. to 1/16000 sec.
Day/Night	IR-cut filter for day & night function
IR Illuminators	30 meters in low light conditions

LED Indicator	System power and status indicator
Connectors	RJ-45 cable connector for Network/PoE connection
Power Input	IEEE 802.3af PoE
Power Consumption	11 W
Dimensions	Ø 145mm x 106mm / 5.7 inches x 4.2 inches
Weight	503g / 22.2oz
Safety Certifications	IK08 vandal resistance FCC, ICES, IEC60950-1
Operating Temperature	-10°C ~ 50°C (14°F~ 122°F)
Humidity	90%
Included Accessories	Setup guide, T10 security Torx screwdriver, screw pack, mounting template

Verkada Inc. 210 South B Street, San Mateo, California, 94401 • sales@verkada.com

All specifications are subject to change without notice. Copyright © Verkada Inc. All rights reserved.