


FIBER OPTIC Splice Closure

JZ-10078

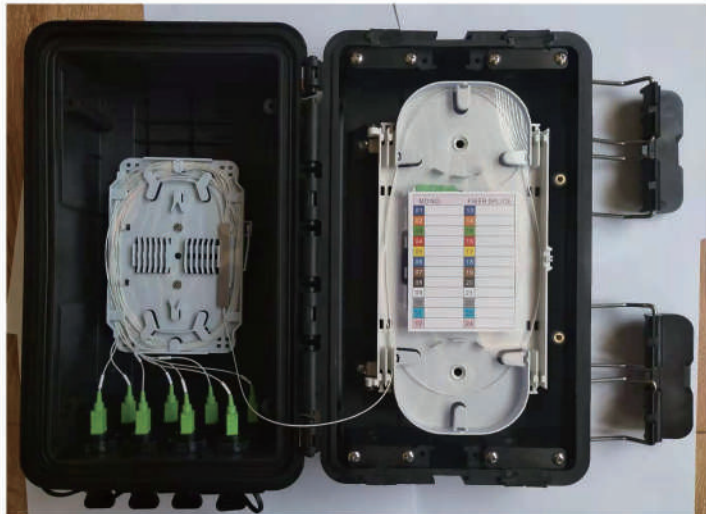

General Description

The Splice closure is an indispensable equipment used in Fiber Communication System, play the roles in sealing, protection, installation of fiber connector head and storage. It is applicable well in cable splicing and with the protection function on fiber optic connect head.

Features

- ◆ Suitable for straight-through, diverging and connection of FTTH, FTTB passive network
- ◆ Use material of high-strength PP plastics
- ◆ Corrosion resistant, aging resistant
- ◆ Trays can be increased and reduced according to the application.
- ◆ Good properties of dust, and moisture proofing

Application

- Telecommunication subscriber loop
- Fiber to the home(FTTH)
- LAN/WAN

Technical Data

Work Temperature	-40 °C ~ +75 °C
Relative Humidity	≤ 85 %
Atmospheric Pressure	70Kpa~106Kpa
Standard	Y D / T 8 1 4 . 1 - 2 0 0 4
Cable Entrance	2*(8-20mm), 8*(5-14mm)
Max capacity	Splice:24Cores,distribution:16Cores
Tension	800N/1min
Impact	1m/1kg Steel Ball/ three times
Bending	150N/±45°/10 cycles
Torsion	50N.m/+90°/10 cycles
Insulation Resistance	2x10 ⁴ MΩ/500V
Compression Strength	15kv/1min/10mA

Dimensions

